


*Conforming to International Maritime Regulations
For Vessels 75 to 200 Meters in Length.*

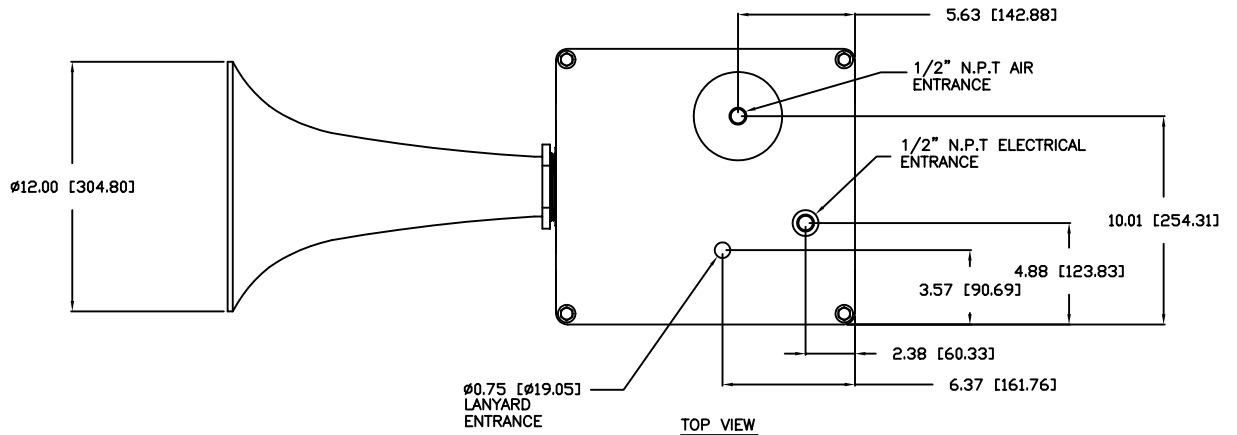


**CURRENT REQUIREMENTS
FOR SOLENOID VALVE**

VOLTAGE	AMPS
220 V.A.C.	0.05
24 V.D.C.	0.50


**CURRENT REQUIREMENTS
FOR HEATING ELEMENT**

VOLTAGE	AMPS
120 V.A.C.	6.50

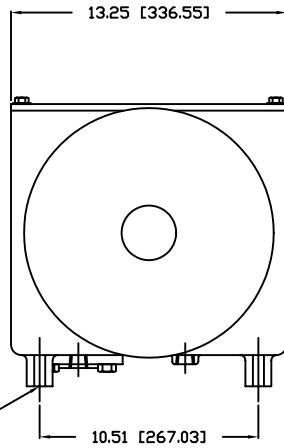

Ø17/32" [13.50] MOUNTING HOLES, 4-PLACES.

FRONT VIEW

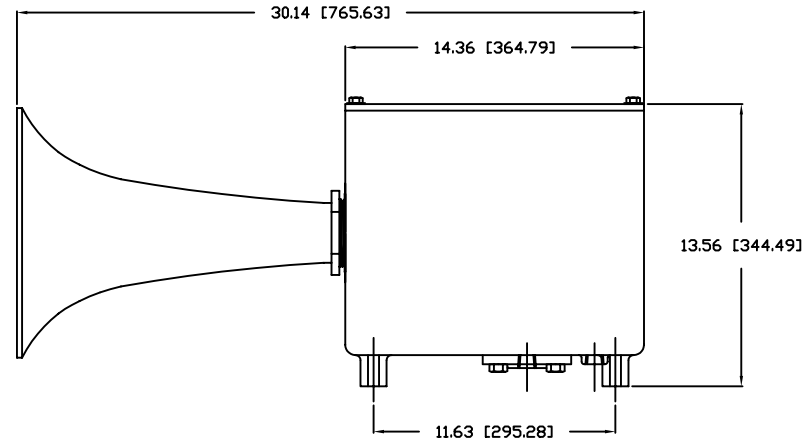

SIDE VIEW

TECHNICAL DATA

Frequency: 266 Hz
 Sound Pressure Level (dB(A) at 1 meter): 136dB
 Sound Pressure Level (1/3 octave at 1 meter): 132dB
 Air Consumption: appx. 61.8 CFM @ 150 P.S.I.
 Air Pressure Req: 100 To 250 P.S.I.
 Electric Power: Any standard A.C. or D.C. voltage
 Material: Aluminum, Bronze & Stainless Steel
 Net Weight: 37.00 Lbs.
 Shipping Weight: 90 Lbs.

Price: \$ _____ U.S.D. Net. Ea.
 (Valid for 60 days, F.O.B. Two Rivers, WI. U.S.A.)

Kahlenberg

KAHLENBERG BROS. CO.

TWO RIVERS, WI. U.S.A.

**MODEL S-216 CHT,
ARCTIC AIRHORN**

DATE	DRWG. NO.	REV.
04/30/01	3-6145	0 EMK