


REV.	BY	DATE	DESCRIPTION	APP'D.

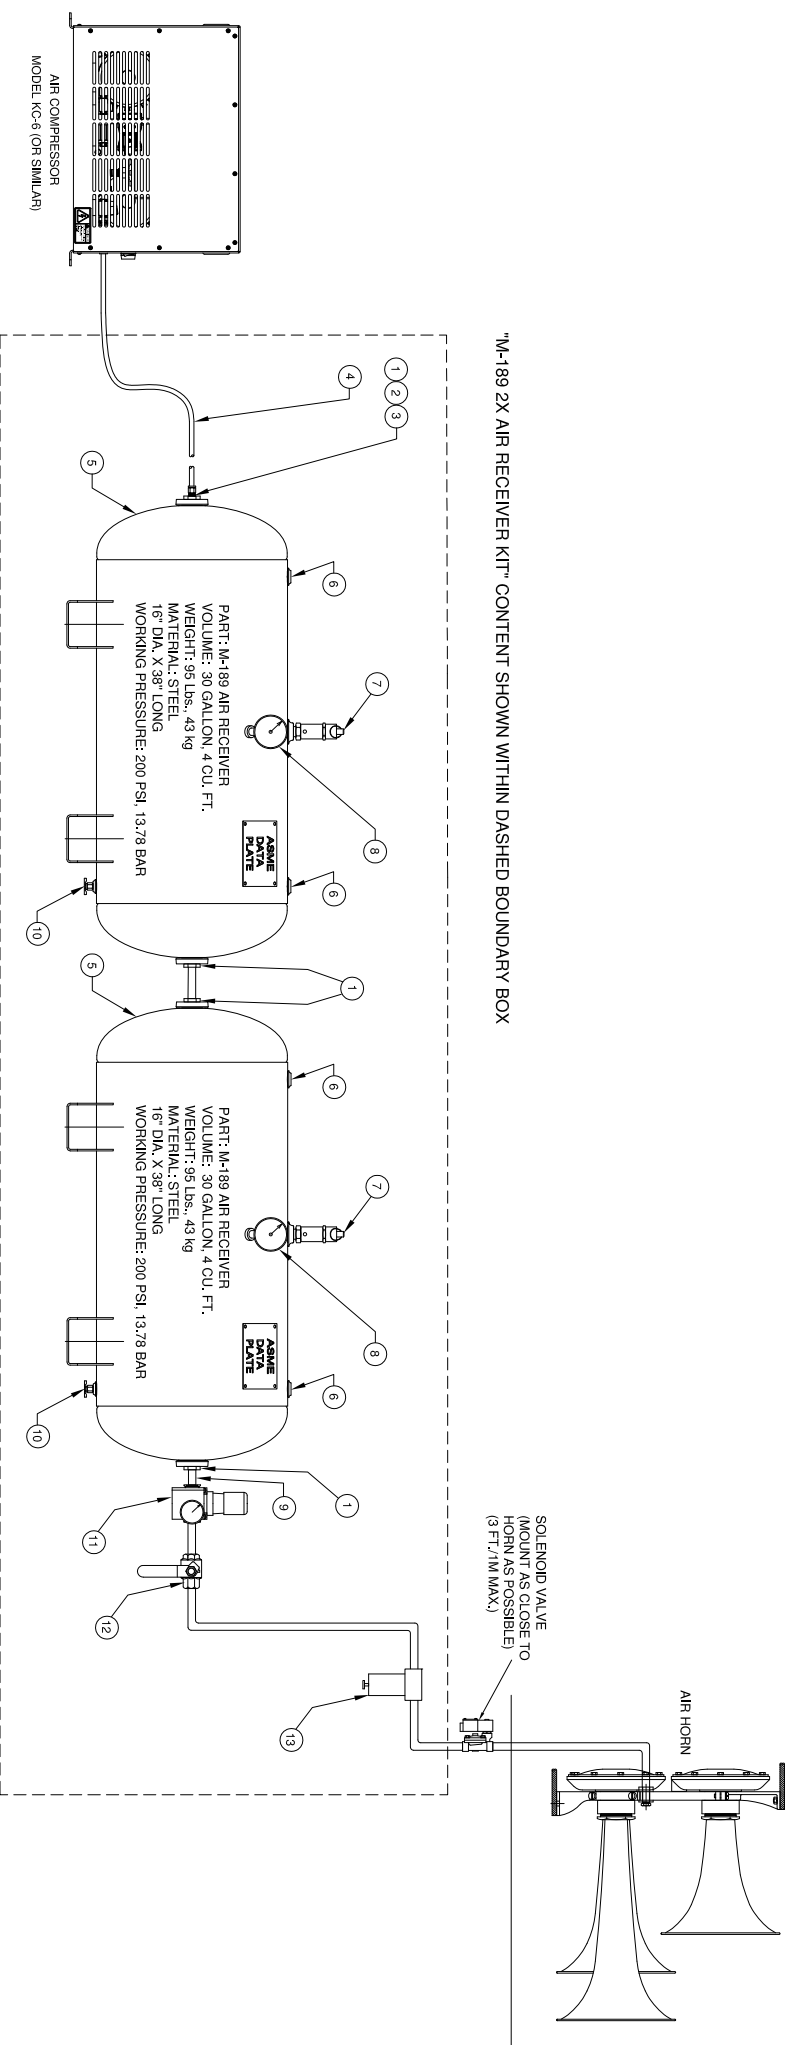

M-189 2X AIR RECEIVER KIT™ CONTENT SHOWN WITHIN DASHED BOUNDARY BOX

- NOTES:
- 1) ALL PIPING SHOULD SLOPE TO AN ACCESSIBLE MOISTURE DRAIN POINT. IT IS RECOMMENDED THAT ADDITIONAL MOISTURE TRAPS BE PLACED AT THE BOTTOM OF ALL VERTICAL PIPING RUNS.
  - 2) THE MAIN AIR LINE FROM AIR RECEIVER TO HORN MUST BE OF ADEQUATE DIAMETER TO MINIMIZE FRICTION LOSS OF PRESSURE IN AIR LINE. CONTACT KAHLBERG INDUSTRIES IF ASSISTANCE IS NEEDED.
  - 3) CHECK ALL PIPING AND FITTINGS REGULARLY TO AVOID LEAKS IN THE SYSTEM. FILTERS, REGULATORS AND OTHER ACCESSORIES SHOULD ALSO BE PROPERLY MAINTAINED.
  - 4) PIPING RUNS SHOWN ARE SCHEMATIC ONLY.
  - 5) THIS DRAWING IS INTENDED TO BE USED IN CONJUNCTION WITH THE COMPLETE INSTRUCTION MANUAL FOR MODEL KC-6 SERIES COMPRESSORS (SHIPPED WITH COMPRESSOR SYSTEM).
  - 6) AFTER THE FIRST M-189 AIR RECEIVER, ALL PIPING, SOLENOID VALVE, AND AIR HORN ARE SHOWN FOR REFERENCE ONLY, AND ARE NOT SUPPLIED WITH THE M-189 2X AIR RECEIVER KIT.

ITEM	PART #	DESCRIPTION	QTY.
1	PT194-021	REDUCER BUSHING, 1-1/4" TO 3/4" N.P.T., CAST IRON	4
2	PT194-001	REDUCER BUSHING, 3/4" TO 1/2" N.P.T., BRASS	1
3	PT16-12	CONNECTOR, QUICK CONNECT, 1/2" N.P.T. TO 3/8" TUBE	1
4	PT138-009	TUBE, NYLON, BLACK, 3/8" O.D.	15
5	M-189	AIR RECEIVER ASME STEEL, FINISH FINISHED, 30 GALLON	2
6	PT27-24	PIPE PLUG, BRASS, 1/2"	2
7	V4305	SAFETY RELIEF VALVE, BRASS, 200 P.S.I. SETTING	2
8	M-118	AIR GAGE, 1/4" N.P.T., CENTER BACK MOUNT	2
9	PT28-24	PIPE NIPPLE, BRASS, 3/4" X 1-1/2"	1
10	DT76-02	PETCOCK, DRUM, 1/4" N.P.T.	2
11	PS3-203	REGULATOR, AIR PRESSURE, 3/4" N.P.T.	1
12	V-122	BALL VALVE, 3/4" N.P.T., FEMALE X FEMALE, BRASS	1
13	M-101	AIR STRAINER, MOISTURE TRAP, BRASS, 3/4" N.P.T.	1

  
 TWO RIVERS, WISCONSIN 54241

**INSTALLATION/PARTS LIST**  
**M-189 2X AIR RECEIVER KIT**

DR.	DATE	CKD.	SCALE	DRWG. NO.	REV.
EMK	09-26-19	EMK	N.T.S.	3-7416	-

Copyright Kahlberg Ind. Inc. 2010